

Maximum Torque: **48,666NM**

Square Drive Range: **3/4" To 2.1/2"**

Max Working Pressure: **10,000PSI**




XSD SERIES

Our Square drive design is a compact unibody giving maximum housing strength and durability whilst maintaining low operating weight.

Fitted with 360x180 coupling manifold to help keep hoses safely away from pinch points.

The XSD range also features anti-lock pawl levers and safety handle attachments.

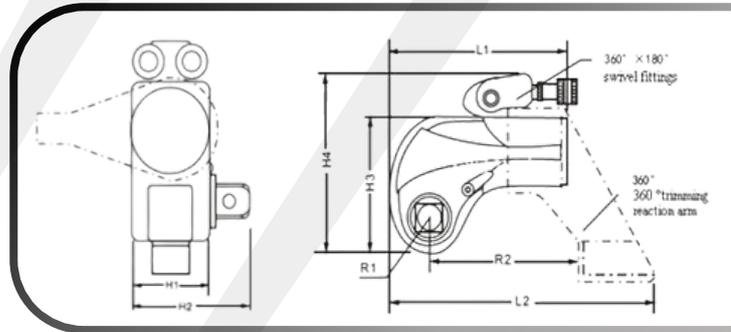

Model	07XSD	1XSD	3XSD	5XSD	8XSD	10XSD	15XSD	20XSD	25XSD	35XSD
Torque Range (NM)	112 - 1120	183 - 1837	451 - 4512	752 - 7528	1078 - 10780	1551 - 15516	2066 - 20627	2666 - 26664	3572 - 34725	4866 - 48666
Drive Size	3/4"	3/4"	1"	1.1/2"	1.1/2"	1.1/2"	2.1/2"	2.1/2"	2.1/2"	2.1/2"
Nut Range (MM)	14 - 30	16 - 36	22 - 48	27 - 56	30 - 64	36 - 72	39 - 80	42 - 90	48 - 100	64 - 120
Weight (KG)	1.8	2.0	4.0	7.0	9.1	13.1	18	25	31	45
L1 (MM)	110.8	130	166	198	213	231	270	295	314	355
L2 (MM)	139.3	182	241	281	308	336	400	443	464	489
H1 (MM)	42	50	68	80	90	100	110	120	137	153
H2 (MM)	65.8	72	95	123	130	141	179	182	200	217
H3 (MM)	76.2	99	130	155	171	187	201	228	255	290
H4 (MM)	108.1	144	176	198	216	230	244	268	295	330
R1 (MM)	20.5	26	34	39	47	51	55	59	67	79
R2 (MM)	68.3	99	134	152	171	174	195	250	251	271